

REMOTE → SEMI-VERTICAL MULTIDECKS

Everest 2.0 RNEV-27 DTO



STANDARD FEATURES


- temperatura pracy urządzenia: od -25°C do -21°C
- czynnik chłodniczy: R744
- 2 x sonda typu NTC
- powierzchnia ekspozycyjna: blacha ocynkowana, malowana proszkowo na kolor biały (RAL 9003)
- 3 rzędy półek zawieszanych, na półkach zawieszanych listwy cenowe 39 mm
- lighting: – LEDit vertical
- inox square bumper

OPTIONS

- electronic expansion valve
- sidewalls

Everest RNEV-27 2500 DTO

DTO — door | triple, straight | hinged

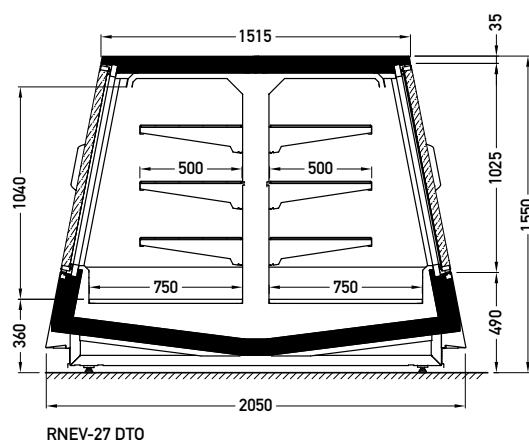

AVAILABLE MODULES

2500 3750

JBG-2 Sp. z o.o. reserves the right to change the standards of devices or to withdraw products without prior notice.

Designation of the energy efficiency class is dedicated to a particular products, which are presented on each page of the catalogue. Indicated energy efficiency class depends on a module type, equipment, glassing version and type of a refrigerant. Amendment of each of the said parameters may cause amendment of the energy efficiency class. Contact the producer to acknowledge the energy efficiency class for the product with different parameters to those presented in the catalogue.