

# Lhotse LDLH-47

GCL | BCA



## STANDARD FEATURES



- working temperature – straight module: from 0°C to 2°C; corner nodules from 4°C to 8°C
- refrigerant: R744
- electrical defrosting
- 2 x NTC temperature probe
- siphoned condensate drains
- exposition: zinc-plated steel, powder coated in white (RAL 9003)
- worktop: linen stainless steel
- expositions full base

## OPTIONS

- electronic expansion valve
- LEDit lighting
- PVC floor profiles
- bumper
- sidewalls

Lhotse LDLH-47 2500 GCL

GCL – glass | single, bent | lift up  
 BCA – low glass or front glass riser | single, bent | fixed

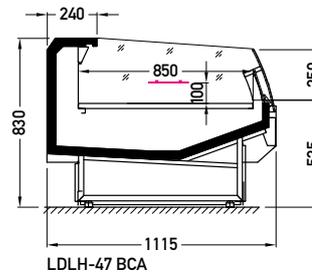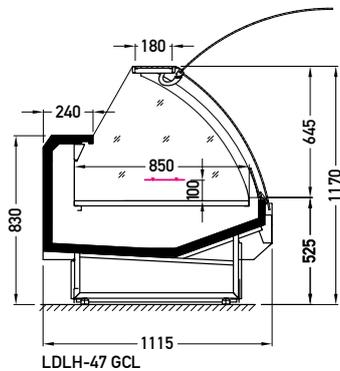

## AVAILABLE MODULES

<b>BCA</b>	1250	1875	2150	2500	3750	
<b>GCL</b>	0938	1250	1875	2150	2500	3750
<b>BCA GCL</b>	NW45	NW90	NZ45	NZ90		

JBG-2 Sp. z o.o. reserves the right to change the standards of devices or to withdraw products without prior notice.

Designation of the energy efficiency class is dedicated to a particular products, which are presented on each page of the catalogue. Indicated energy efficiency class depends on a module type, equipment, glassing version and type of a refrigerant. Amendment of each of the said parameters may cause amendment of the energy efficiency class. Contact the producer to acknowledge the energy efficiency class for the product with different parameters to those presented in the catalogue.